
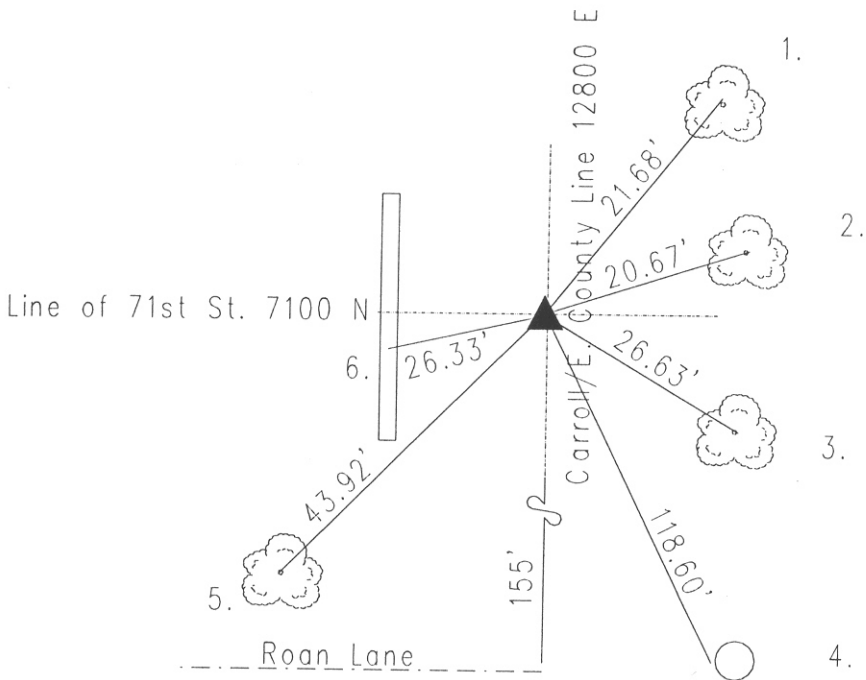


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 34 TOWNSHIP 17 RANGE 5  
DATE: 8-4-04  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 5-21-99

IN. S.P.C. E ZONE NAD '83  
NAME: 17053403  
N: 514697.6640(m)  
E: 76785.0280(m)

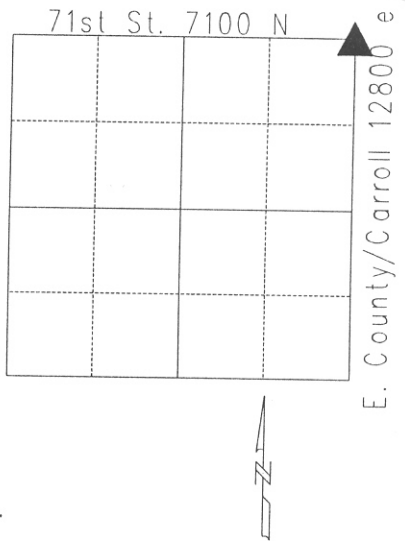

Original post set 1821 by Laughlin with witness: 6" ash S 84 E 10 links;  
8" beech S 11 W 44 links per Marion County Atlas pg. 16. Survey 2-1849 by  
Hosbrook per Lawrence Township Legal Survey Book pg. 15 & 36. called corner  
"K". Legal 2-1849 by Hosbrook per Lawrence Township Legal Survey Book pg. 16 &  
41 called corner "F". 3-26-79 Wilcoxon called iron pin 4" dn. Excavated 9-9-82  
by Wilcoxon. 2 1/2'x3' hole dug 40" dn. 2' long iron pin found 4: dn. No other  
marker found. Harrison set. Re-tied by Wilcoxon 10-12-94. Re-tied 5-21-99 by  
Wilcoxon. Re-tied 8-4-04 by Wilcoxon.  
17053403

REF.	DISTANCE	DESCRIPTION
1.	21.68'	Mag nail w/brass washer W 12" ash 12"up
2.	20.67'	Mag nail w/brass washer N 6" hickory 30"up
3.	26.63'	Mag nail w/brass washer SW 10" ash 24"up
4.	118.60'	Mag nail w/brass washer W utility post 2"up
5.	155'+/-	Due S to Roan Lane
6.	43.92'	PK nail w/brass washer W twin cottonwood 3"up
7.	26.33'	PK nail in curb joint.